(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B071/15 R1** replaces ZP/B097/13 R1

(3) Product: **Anchor device type A**
Type: POINT-13 resp. POINT-15

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10, 4656 Kirchham, Austria**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this type examination certificate.

(7) The certification body of DEKRA EXAM GmbH certifies that this product comply with the fundamental requirements of the standard listed under item 8 below. The examination and test results in the test and assessment report PB 13-164 Revision_01 and PB 15-118.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012 **DIN CEN/TS 16415:2013**

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2020-08-28

DEKRA EXAM GmbH
Bochum, 2015-09-07

signed: Wiegand	signed: Mühlenbruch
Certification body	Special services unit

We confirm the correctness of the translation from the German original. In the case of arbitration only the German wording shall be valid and binding.

Certification body	Special services unit

This certificate may only be published in its entirety and without any change.
DEKRA EXAM GmbH, Dinnendahlstrasse 9, 44809 Bochum, Germany
telephone +49.234.3696-105, fax +49.234.3696-110, zs-exam@dekra.com

(11) Appendix to

(12) **Type Examination Certificate**
ZP/B071/15 R1 replaces ZP/B097/13 R1

(13) 13.1 Subject and Type
Anchor device type A
Typ: POINT-13 resp. POINT-15

13.2 Description
As a single anchor point, the anchor device, type: POINT-13 and POINT-15, serves the protection of a maximum of three persons against falls from a height.
The anchor device consists of an anchor point fitted with a bolt to the upper end of a support of Ø 16 mm round steel and is secured by M16 hexagon nuts. The user can attach his personal protective equipment to the freely rotating anchor point. The anchor device is grouted into concrete with injection mortar.
The anchor device is made of corrosion resistant steel.

- Support length: 100 mm to 600 mm
- Loads can be attached in all directions horizontally to the roof edge
- Fixing by 3 x hexagon nuts M16 A2 DIN 934

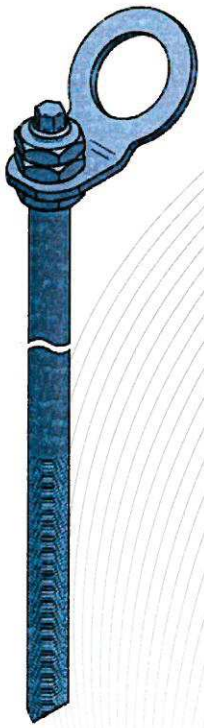

Figure 1: Anchor device, type: POINT-15

This certificate may only be published in its entirety and without any change.
DEKRA EXAM GmbH, Dinnendahlstrasse 9, 44809 Bochum, Germany
telephone +49.234.3696-105, fax +49.234.3696-110, zs-exam@dekra.com

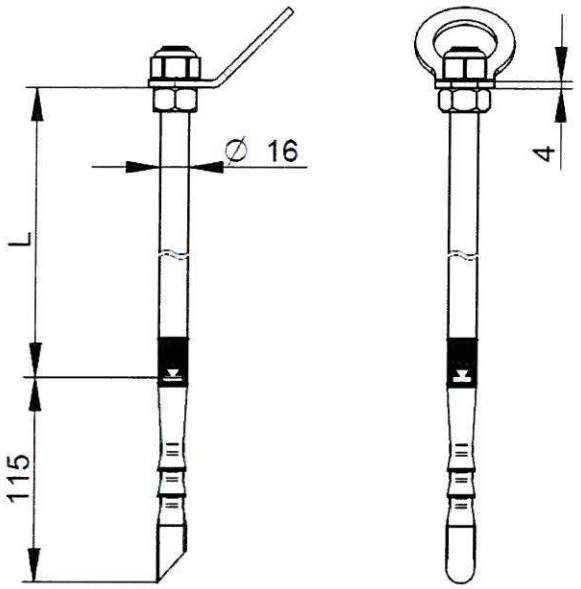

- Support length: 300 mm to 600 mm
- Loads can be attached in all directions horizontally
- Fixed by 1x locking nut M16 A2 DIN 985 and hexagon nut DIN M16 A2 DIN 934

Figure 2: Anchor device, type POINT-13

(14) Test and Assessment Report

PB 13-164 Revision_01 dd. 2014-07-16 and PB 15-118 dd. 2015-07-29

This certificate may only be published in its entirety and without any change.
DEKRA EXAM GmbH, Dinnendahlstrasse 9, 44809 Bochum, Germany
telephone +49.234.3696-105, fax +49.234.3696-110, zs-exam@dekra.com